



## STEP 1

Unplug the power connection to the luminaire by pulling apart the WAGO connectors.

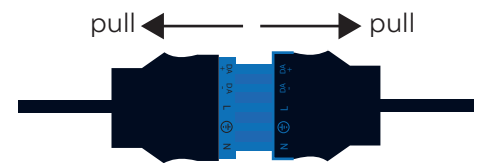

## STEP 2

Take down the luminaire by opening the ceiling cup and unscrewing the screws securing the cup to the ceiling.

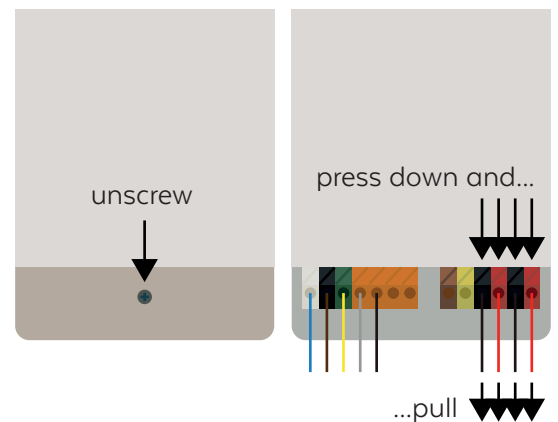

## STEP 3

Unscrew the screw(s) on the driver touch protection using a screwdriver with a PH2 head.


Unplug the cables by pressing down the cable securing button on the driver.

## STEP 4

Unscrew all the screws on the top of the luminaire with a suitable bit and screwdriver.


## STEP 5

Remove the diffuser from the luminaire.  
N.B. Don't use any sharp objects.

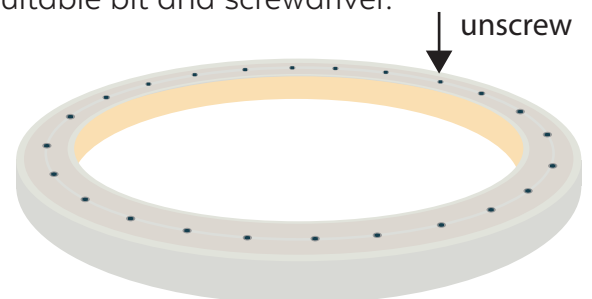

## STEP 6

Unplug the light source(s).

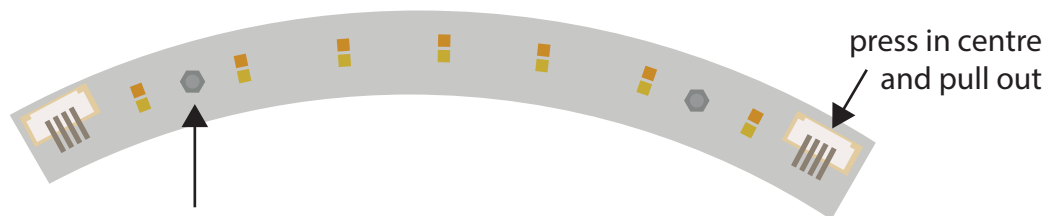

## STEP 7

Unscrew the screws holding the light source(s) with a suitable bit and screwdriver.

## STEP 8

Recycle all parts accordingly.

If replacing the light source; attach new light source and remount the luminaire by following this instruction in reverse.

