



Rond opbouw LED armatuur gemaakt uit wit gelakt (RAL 9003) aluminium (optioneel zwart RAL 9005 of zilvergrijs RAL 9006). Homogeen verlichte diffuser van dual satin opaal PMMA of Microprisma. Gelijke licht dichtheid tussen verschillende afmetingen. Geschikt voor toepassing in onder andere winkelcentra, culturele gebouwen of kantoren. Triple tunable white - dynamisch mengen van licht kleur tussen 1800k, 2700K en 6500K. Onderhoudsarm en hoge levensduurverwachting (50.000 uur L90B10). Kleur stabiliteit, Mac Adam <3. Vijf jaar garantie.

Round surface mounted luminaire made of white (RAL 9003) painted aluminium (optionally black RAL 9005 or silver grey RAL 9006). Completely homogeneously illuminated with dual satinised PMMA cover or micro prisma diffuser. Suitable for shopping centres, social and cultural amenities or representation areas. Triple tunable white - dynamic mixing of light colour, linear colour mixing between 1800k, 2700K and 6500K. Low maintenance and high life expectancy (50.000 hours L90B10). Colour stability, Mac Adam <3. Warranty five years.

Micro Prisma / Micro Prism

Wattage Wattage	Kleur Colour	Lumen* Lumen*	Diameter (mm) Diameter (mm)	kg kg	Noodvoorz. (u) Emergency (h)	Dali-BCL Dali-BCL
26w	1800k-2700k-6500k	2080-2860-3120	350	3,2	1/3	B26002_M.35.TW3

\_ W=wit / B=zwart / G=grijs

\_ W=white / B=black / G=grey



\* Lichtstroom van armatuur, tolerantie van +/- 10%

\* Luminaire luminous flux, tolerance of +/- 10%



**BCL certification** ensures integration into the Biocentric lighting system with characterization of light properties for health and circadian impact. Integration into the BCL system optimizes health, visual comfort and aesthetics and as a solution delivers Biocentric lighting compliant with ISO 8995-1:2025. BCL certified luminaires by Melis Lighting will enjoy all features and the full health benefits of a Biocentric lighting solution, giving you healthy lighting with your favorite luminaires.

## OPBOUW ARMATUREN SURFACE MOUNTED LUMINAIRES

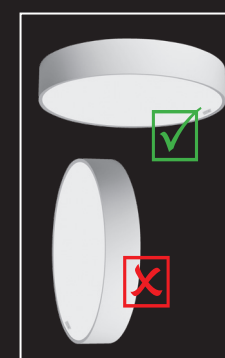

B26002\_M.35.TW3

26W 1800k-2700-6500K 2080-2860-3120lm  
ηLB 100%

melis lighting

