

Marici 120 Specular TWR BCL



Triple Tunable White LED downlight met lage inbouwhoogte en gesatineerde PS Microprisma afscherming. Brede bundel (>80°) en lage verblinding op maximaal vermogen (UGR<22). Hoogglans aluminium reflector. Triple Tunable white - dynamisch mengen van licht kleur tussen 1800k, 2700K en 6500K (CRI>94). Wit gelakte (RAL 9003) aluminium behuizing. Zeer geschikt als basis verlichting in langdurige zorg en gezondheidszorg instellingen (gangen en hallen). Wordt geleverd inclusief externe DALI driver. Directe aansluiting op 220-240VAC. Kleurstabiliteit Mac Adam <3. Snelle en eenvoudige montage met veren. Onderhoudsvrij en hoge levensduurverwachting (60.000 uur L90B10). Vijf jaar garantie.

Triple Tunable white modular LED downlight with a satinated PS Microprism diffuser. Wide beam angle (>80°) and low glare at maximum power (UGR<22). High gloss aluminum reflector. Triple Tunable white - dynamic mixing of light colour, linear colour mixing between 1800k, 2700K and 6500k (CRI>94). White painted aluminium die cast body (RAL9003). Very suitable in long term care and health care (corridors and hallways). Delivered including external DALI driver. Direct connection to 220-240VAC. Colour stability, Mac Adam <3. Low maintenance and high life expectancy (60.000 hours L90B10). Fast and easy mounting with springs. Five years warranty.

Wattage Watts	Kleur Colour	Lumen* Lumen*	mDER range mDER range	CRI CRI	Gewicht (kg) Weight (kg)	Noodvoorz. (u) Emergency (h)	Dali-BCL Dali-BCL
24w	1800k	1343	0,23-0,94	~	1,3	1/3	B23008W.24.TRW
24w	2700k	1968	0,23-0,94	>94	1,3	1/3	
24w	6500k	2277	0,23-0,94	>94	1,3	1/3	

* Lichtstroom van armatuur, tolerantie van +/- 10%

* Luminaire luminous flux, tolerance of +/- 10%

BCL certification ensures integration into the Biocentric lighting system with characterization of light properties for health and circadian impact. Integration into the BCL system optimizes health, visual comfort and aesthetics and as a solution delivers Biocentric lighting compliant with ISO 8995-1:2025. BCL certified luminaires by Melis Lighting will enjoy all features and the full health benefits of a Biocentric lighting solution, giving you healthy lighting with your favorite luminaires.

INBOUW DOWNLIGHTS RECESSED DOWNLIGHTS







Opties:

- GST18i5® connector
- Andere RAL kleur
- IP65

Options:

- GST18i5® connector
- Different RAL color
- IP65

Powersupply and DALI con: WAGO Winsta (770-1115 and 770-515/023-000)
Cable length: 0,5m

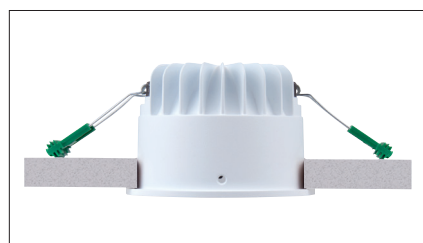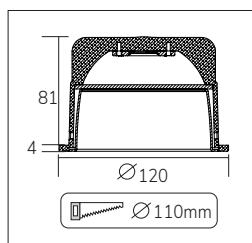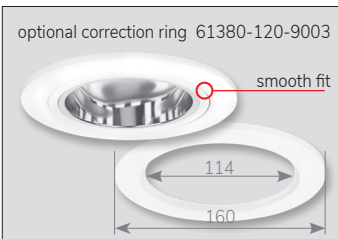

B23008W.24.TRW
24w 1800-2700-6500k 1343-1968-2277lm
ηLB 74%

melis lighting