

# Marici 150 Specular TW BCL

PF>0,95



IP44-65



Compacte tunable white LED downlight met lage inbouwhoogte en gesatineerde PS Microprisma afscherming voor extra comfort. Brede bundel (>80°) en lage verblinding op maximaal vermogen (UGR<22). Hoogglans aluminium reflector. Tunable white - dynamisch mengen van licht kleur tussen 2700K en 6500K. Wit gelakte (RAL 9003) aluminium behuizing. Zeer geschikt als basis verlichting in scholen, theaters en musea. Wordt geleverd inclusief externe DALI driver. Directe aansluiting op 220-240VAC. Kleurstabiliteit Mac Adam <3. Snelle en eenvoudige montage met veren. Onderhoudsvrij en hoge levensduurverwachting (60.000 uur L90B10). Vijf jaar garantie.




Compact tunable white modular LED downlight with satinated PS Microprism diffuser for high comfort. Wide beam angle (>80°) and low glare at maximum power (UGR<22). Specular aluminum reflector. Tunable white - dynamic mixing of light colour, linear colour mixing between 2700K and 6500K. White painted die cast aluminum body (RAL9003). Very suitable as general lighting in schools, theatres and museums. Delivered including external DALI driver. Direct connection to 220-240VAC. Colour stability, Mac Adam <3. Low maintenance and high life expectancy (60.000 hours L90B10). Fast and easy mounting with springs. Five years warranty.

Wattage Watts	Kleur Colour	Lumen* Lumen*	CRI CRI	Gewicht (kg) Weight (kg)	Noodvoorz. (u) Emergency (h)	Dali Dali	Casambi Casambi
32w	2700-6500k	2790-3205	>92	0,75	1/3	B23013W.32.TW	B23013W.32.TWC

\* Lichtstroom van armatuur, tolerantie van +/- 10%

\* Luminaire luminous flux, tolerance of +/- 10%

**BCL certification** ensures integration into the Biocentric lighting system with characterization of light properties for health and circadian impact. Integration into the BCL system optimizes health, visual comfort and aesthetics and as a solution delivers Biocentric lighting compliant with ISO 8995-1:2025. BCL certified luminaires by Melis Lighting will enjoy all features and the full health benefits of a Biocentric lighting solution, giving you healthy lighting with your favorite luminaires.

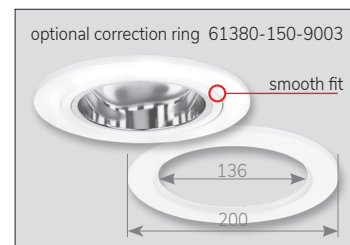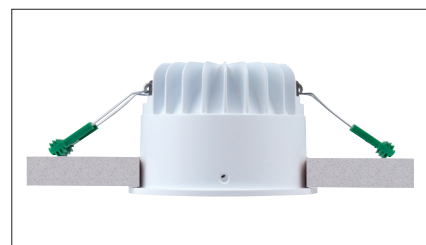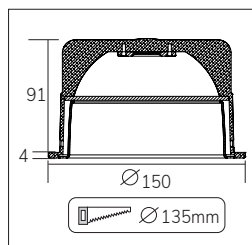


## Opties:

- GST18i5<sup>®</sup> connector
- Andere RAL kleur
- IP65

## Options:

- GST18i5<sup>®</sup> connector
- Different RAL color
- IP65



B23013W.32.TW

32w 2700-6500K 2790-3205lm  
ηLB 77%

melis lighting

