

# Marici 150 Specular TWR BCL



Triple Tunable White LED downlight met lage inbouwhoogte en gesatineerde PS Microprisma afscherming. Brede bundel (>80°) en lage verblinding op maximaal vermogen (UGR<22). Hoogglans aluminium reflector. Triple Tunable white - dynamisch mengen van licht kleur tussen 1800k, 2700K en 6500K (CRI>94). Wit gelakte (RAL 9003) aluminium behuizing. Zeer geschikt als basis verlichting in langdurige zorg en gezondheidszorg instellingen (gangen en hallen). Wordt geleverd inclusief externe DALI driver. Directe aansluiting op 220-240VAC. Kleurstabiliteit Mac Adam <3. Snelle en eenvoudige montage met veren. Onderhoudsvrij en hoge levensduurverwachting (60.000 uur L90B10). Vijf jaar garantie.

Triple Tunable white modular LED downlight with a satinated PS Microprism diffuser. Wide beam angle (>80°) and low glare at maximum power (UGR<22). High gloss aluminum reflector. Triple Tunable white - dynamic mixing of light colour, linear colour mixing between 1800k, 2700K and 6500k (CRI>94). White painted aluminium die cast body (RAL9003). Very suitable in long term care and health care (corridors and hallways). Delivered including external DALI driver. Direct connection to 220-240VAC. Colour stability, Mac Adam <3. Low maintenance and high life expectancy (60.000 hours L90B10). Fast and easy mounting with springs. Five years warranty.

Wattage Watts	Kleur Colour	Lumen* Lumen*	mDER range mDER range	CRI CRI	Gewicht (kg) Weight (kg)	Noodvoorz. (u) Emergency (h)	Dali-BCL Dali-BCL
30w	1800k	1717	0,23-0,94	~	1,3	1/3	B23013W.30.TRW
30w	2700k	2519	0,23-0,94	>94	1,3	1/3	
30w	6500k	2915	0,23-0,94	>94	1,3	1/3	

\* Lichtstroom van armatuur, tolerantie van +/- 10%

\* Luminaire luminous flux, tolerance of +/- 10%

**BCL certification** ensures integration into the Biocentric lighting system with characterization of light properties for health and circadian impact. Integration into the BCL system optimizes health, visual comfort and aesthetics and as a solution delivers Biocentric lighting compliant with ISO 8995-1:2025. BCL certified luminaires by Melis Lighting will enjoy all features and the full health benefits of a Biocentric lighting solution, giving you healthy lighting with your favorite luminaires.

INBOUW DOWNLIGHTS RECESSED DOWNLIGHTS








#### Opties:

- GST18i5® connector
- Andere RAL kleur
- IP65

#### Options:

- GST18i5® connector
- Different RAL color
- IP65

Powersupply and DALI con: WAGO Winsta (770-1115 and 770-515/023-000)  
Cable length: 0,5m

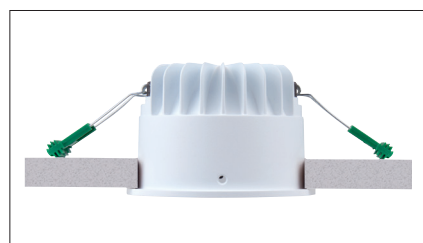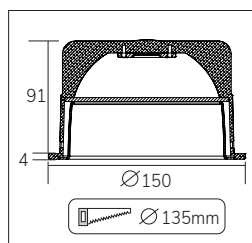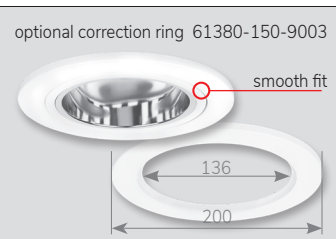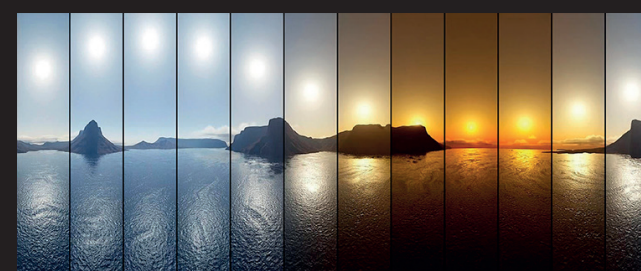

**B23013W.30.TRW**  
30w 1800-2700-6500k 1717-2519-2915lm  
ηLB 74%

**melis lighting**